



LOFTREX™ industrial filter cartridges

Eaton's LOFTREX filter cartridges are suitable for a wide range of process applications including water treatment, DI water, RO pre-filtration, chemicals, solvents and galvanic baths.

LOFTREX filter cartridges are manufactured from polypropylene microfibers, which are thermally bonded together in order to prevent fiber loss.

Features and benefits

- Made of pure polypropylene micro fibers, thermally bonded to prevent any fiber migration
- The polypropylene filter material offers excellent chemical compatibility
- No inner core
- Graded pore structure offers high dirt-holding capacity with low initial pressure

- No surfactants are present to generate extractables leading to foaming or other undesirable effects on the filtrate
- All materials used meet the FDA requirements according to 21 CFR § 177

Specifications

Filter material
Polypropylene (meltblown)

Retention ratings
1, 3, 5, 10, 20, 50 and 75 µm @ 80% efficiency

Technical data

Nominal lengths
9.75", 10", 19.5", 20", 29.25", 30", 40"
(248, 254, 495, 508, 743, 762, 1016 mm)

Outside diameter
2.5" (63 mm)

Inside diameter
1.1" (28 mm)

Max. operating temperature
65°C

Max. differential pressure
2.0 bar @ 21°C

Recommended differential change-out pressure for disposal
2.4 bar

FDA: Food and Drug Administration




Powering Business Worldwide

LOFTREX industrial filter cartridges

Flow rate*

(21°C per 10" element for water for water)

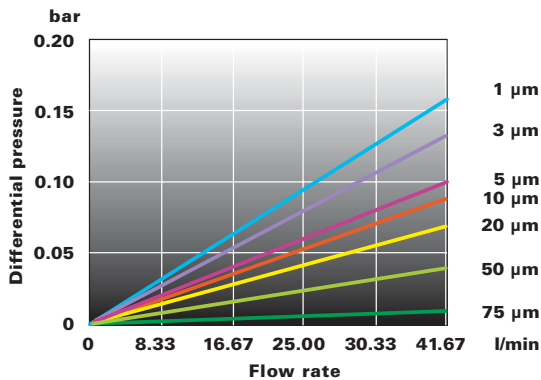


* For liquids other than water, multiply pressure drop by fluid viscosity in centipoise.

Ordering code

Nominal lengths

- 9: 9.75"
- 10: 10"
- 19: 19.5"
- 20: 20"
- 29: 29.25"
- 30: 30"
- 40: 40"



Filter type
LX: LOFTREX

Retention ratings

- 1: 1 µm
- 3: 3 µm
- 5: 5 µm
- 10: 10 µm
- 20: 20 µm
- 50: 50 µm
- 75: 75 µm

North America

18684 Lake Drive East
Chanhassen, MN 55317
Toll Free: +1 800-656-3344
(North America only)
Tel: +1 732-212-4700

Europe/Africa/Middle East

Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

Greater China

No. 7, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 2899-3687

Asia-Pacific

100G Pasir Panjang Road
#07-08 Interlocal Centre
Singapore 118523
Tel: +65 6825-1620

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2024 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

EN
EF-LX
05-2024



Powering Business Worldwide

